


# MODEL 7010

## PCI-EXPRESS AUTOMATIC VIDEO TRACKER

### EDGE/CENTROID/CORRELATION

The Model 7010 PCI-Express Automatic Video Tracker (AVT) belongs to the latest tracker product family in E-O Imaging's continued commitment to product innovation and improvement and is also available with either a High Definition (HD), Digital Visual Interface (DVI) or Camera Link (CL) digital video capability. This single board tracker provides the user a system easily adapted to a wide range of target and tracking environments through the incorporation of the latest in digital signal processing (DSP) and field programmable gate array (FPGA) technology (providing a flexible architecture for customization). The Model 7010 interfaces with both analog and digital video sources, providing ease in interfacing with a wide variety of sensor systems. The analog video interface provides full 12-bit, 4096 gray level capability supporting an array size up to 1024 x 1024. The HD video interface supports 480i, 480p, 720p, 1080i and 1080p resolutions, SMPTE 259M / 344M / 292M / 424M, while the Camera Link digital video interface supports array sizes up to 2048 x 2048 with 16-bit resolution. The tracker design incorporates a multiple DSP implementation allowing concurrent operation of algorithms in realtime. The system is structured with an open architecture allowing easy incorporation of specialized features and algorithms. The Model 7010's standard features and options permit easy adaptation to even the most complex and demanding test range, tactical, surveillance and industrial applications.

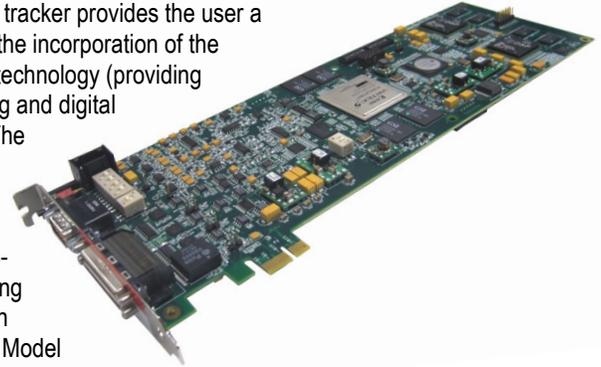

**The Model 7011 tracker provides the same performance with a dual target capability.**

#### Standard Features

- Selectable Edge, Mass/Intensity Centroid, Vector\* and Correlation Algorithms
- Multi-Target Detection and Acquisition
- Sophisticated Intrusion Detection and Recovery Algorithms
- Auto Acquisition and Target Detection
- Automatic/Manual/Gate Size and Position
- Adaptive and Manual Threshold Functions
- Robust Coast and Target Reacquisition Algorithms
- Advanced PID Servo Compensation Filter
- Embedded Motion Control Interface for Various Pedestals
- Embedded Smart Lens Controller Interface
- Embedded Laser Rangefinder Interface
- RS-232/422 Serial Communication Ports (8)
- PCI-Express 1X Interface
- Zoom Scaling/Correction
- Interlaced and Progressive Video Format Capability
- 2048 x 2048 Sensor Array Capability
- Frame Rates up to 250 Hz and Pixel Clock Rates up to 206 MHz
- Standalone Configuration (without PCIe backplane)
- Integrated Target Simulator
- User Text Annotation and Symbology
- Dual Graphic Overlay Planes with Multiple Sprites
- Analog Video
  - RS-170 / RS-170A / NTSC / PAL / CCIR / RS-343
  - Inputs (4), Differential or Single-ended, 12-bit Resolution
  - Outputs (3), 2 with Symbology and 1 without
- Analog Inputs (8), 16-bit Resolution
- Analog Error Outputs (2),  $\pm 5$  or  $\pm 10$  Volts

#### Digital Video Interface Options

- High Definition 3G-SDI Interface
  - (2) Inputs, (1) Output with Symbology, (1) output without Symbology
- Camera Link Full Interface, (1) Input, (1) Output with Symbology
- DVI Interface, (1) Input, (1) Output with Symbology

#### Typical Applications

- Weapon System Director
- Real Time Missile and Aircraft Tracking
- Surveillance
- Weapon System Evaluation
- Simulator Systems
- Trajectory Analysis
- Bomb and Weapons Scoring
- Image Matching
- Automated Calibration of Tracking Systems
- Laser System Alignment
- ECM Evaluation
- Spatial Measurement of Objects
- Re-entry Vehicle and Satellite Tracking

#### Available Options

- Remote Control Unit (Models 702 and 704)
- Environmentally Ruggedized Camera System (Models 901 and 902)
- Nonstandard Video Formats and Interfaces
- Custom Symbology and Graphics
- Custom Packaging
- Custom Algorithms
- Trajectory Simulation Capability
- Operator Training Capability
- Image Stabilization
- Image Processor
  - Target Enhancement/Detection
  - User-Definable Filter Characteristics
- Multi-Target Tracking

### Engineering High Performance Tracking Solutions

*This document contains information which is proprietary to Electro-Optical Imaging, Inc. The information in this document shall not be disclosed, duplicated or used in whole or in part without permission. The information subject to this restriction is contained in all pages of this document.*

# MODEL 7010

## PCI-EXPRESS AUTOMATIC VIDEO TRACKER SPECIFICATIONS

### Electrical Interface

- **Composite Analog Video Inputs (4)**
  - Compatible with TV or FLIR 525/625
  - Video Std's RS-170 / RS-170A / NTSC / PAL / CCIR / RS-343
  - Single-Ended or Differential, Switch Selectable
- **Composite Video Outputs (3)**
  - Two (2) mixed with symbology
  - One (1) with no symbology
- **3G-SDI Interface (HD option)**
  - Two (2) input channels
  - One (1) full channel input
  - One (1) full channel output without symbology
- **Camera Link Interface (CL option)**
  - One (1) full channel input
  - One (1) full channel output with symbology
- **Analog Errors (2)**
  - Azimuth and Elevation Errors
- **Tracker Status Discretes (3)**
  - On-Target Discrete: indicates that target data is present
  - Coast Discrete: indicates target has been lost and reacquisition sequence is in process
  - Track/Acquire: indicates track state
- **Digital Input/Output**
  - 16-bit bi-directional interface
- **Analog Input (8)**
  - Analog input ports +/- 10v max, 8 channels, 16-bit Resolution for Joystick, Zoom Position and Related Functions

### System Control Interface

- **Serial Interfaces (8)**
  - 115.2 K bit max. (default) - Software selectable RS-232/422
- **PCI-Express x1 Interface**
- **Gigabit Ethernet Interface**
  - Auto-negotiating 10/100/1000 Ethernet interface
  - Auto-MDIX

### Functionality

- **Tracking Algorithms**
  - Mass Centroid
  - Intensity Centroid
  - Selectable Edge (top, bottom, left, right)
  - Correlation (Exhaustive Search)
  - Vector (Leading Edge) Track\*
- **Tracking Gate Auto/Manual Size**
  - Manual: adjustable from 1% to 90% of the field-of-view area in Edge and Centroid Modes
  - Adaptive: automatically adjusts to variations in target size
  - Correlation Mode: Reference area size from 8 x 8 up to 64 x 64 elements, independent horizontal and vertical size controls. Search area is 128 x 128 pixels/lines.
- **Threshold (automatic/manual)**
  - Allows identification of White and/or Black contrast targets or target gray levels
  - Automatic multi-gray level detection

- **Automatic Coast Mode**
  - Statistical Process determines the validity of the target
  - Optimal recovery from intrusions and disruption of track
- **Reticle**
  - Defines the AZ/EL null point of the system
  - User selectable reticle formats
- **Display Symbology**
  - Tracking Gate Outline (Window/Corners)
  - Reticle (Crosshair)
  - Track Point Indicator (Flag/Crosshair)
  - Offset Track Point
  - Threshold Enhancements (Highlighted Target Data)
  - Characters for displaying system status and mode information
  - Alphanumeric generator for user-defined messages
- **Graphical User Interface**
  - PC-based program for configuration setup and testing through the RS-232/422, PCI-e or Ethernet interface
- **Built-In-Test**
  - Performs end-to-end testing
  - Verifies all track modes
- **Field Downloadable Software Updates (DSP/FPGA)**
- **Sophisticated PID Filter**
- **Configuration Save Capability**
  - Stores up to 10 user-defined configurations in FLASH
  - Allows user to define Tracker boot-up configuration
- **Embedded Motion Control Processor**

### Physical Specifications

- **Board Dimension (Tracker)**
  - Full Length PCI-Express x1 Card
- **Daughter Board Dimension (3G-SDI, DVI and Camera Link)**
  - 9.5 inches (241 mm)
- **All Cards Conformal Coated**
- **Temperature Range (Standard)**
  - Operating: -40° to +85°C (50 ft/min airflow)
  - Storage: -45° to +85°C
- **Cooling**
  - Convection 50 ft/min airflow
- **Relative Humidity**
  - 0 to 95% non-condensing, Operational
  - 0 to 95% non-condensing, Storage
- **Altitude**
  - 0 to 10,000 ft (3,000 m), Operational
  - 0 to 40,000 ft (12,000 m), Storage



ELECTRO-OPTICAL IMAGING, INC.  
4300 Fortune Place, Suite C  
West Melbourne, FL 32904

phone: 321-435-8722 • fax: 321-435-8723  
email: sales@eoimaging.com • website: www.eoimaging.com

\* Vector Track mode is only available with mount position feedback.

*Specifications subject to change without notice. Consult Factory for latest specification and available options.*